




INDIRECT CLAMPING TERMINAL BLOCKS

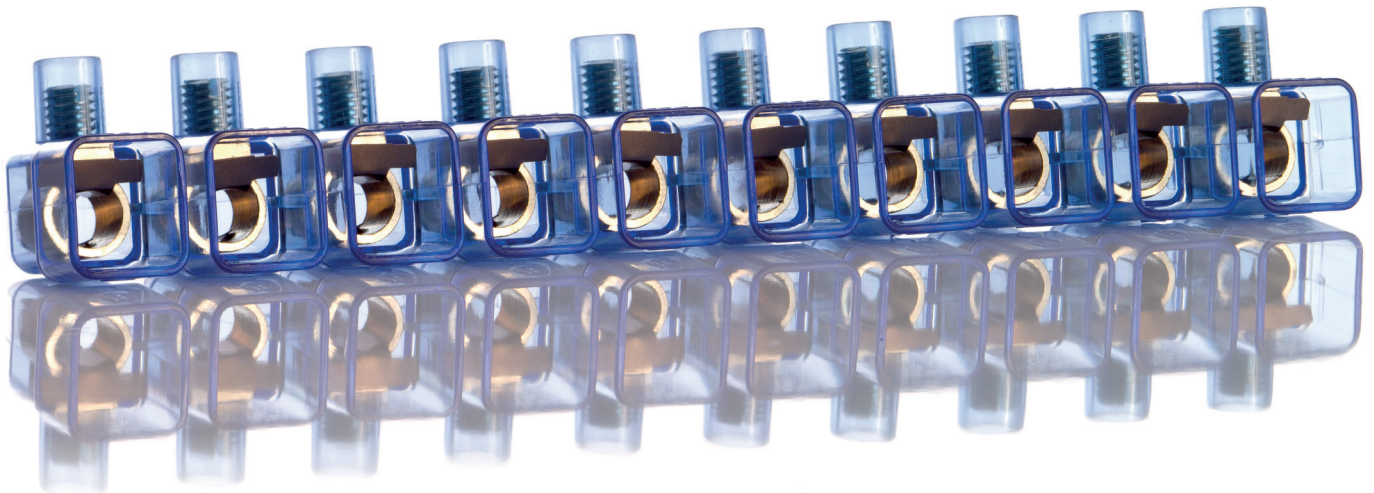

INDIRECT CLAMPING TERMINAL BLOCKS

9924CS - 993CS - 994CS



Wide connection capacity compared to its direct tightening counterpart

- More conductors combinations
- Clamping of conductors with smaller sections




Time saver

It is not necessary to twist the cables: ease of insertion, speed and simplicity in the eventual disconnection



Space saver

Compact dimensions, the same as the historical BM one way terminal blocks

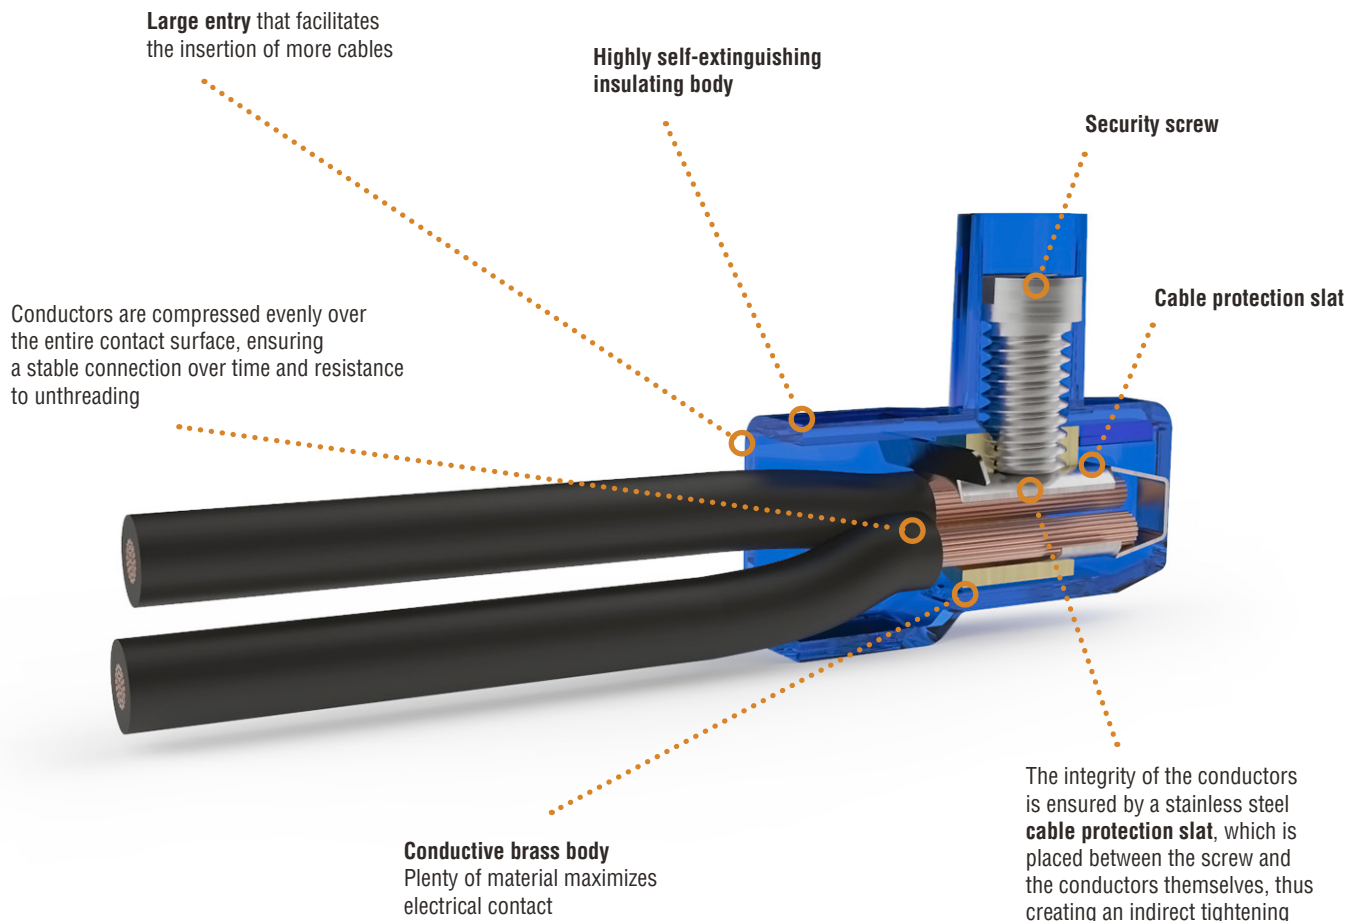

**HALOGEN
FREE**

Halogen free to install the terminal block everywhere




UK
CA




MADE
IN ITALY

Compliant to harmonized standard
IEC/EN 60947-7-1



In 10 ways bar

ONE-WAY TERMINAL BLOCKS • END CONNECTORS • BARS • WITH INDIRECT CLAMPING

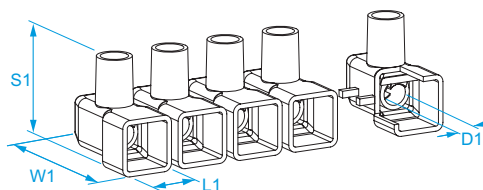**INSULATING HOUSING:** transparent polycarbonate (PC) UL 94 V0**CONDUCTIVE BODY:** brass**WIRE PROTECTION:** stainless steel**CAPTIVE SCREW IN:** galvanized steel**INSULATION SELF-EXTINGUISHING:** EN 60335-1: 2002+A2:2006

(par. 30.2.3), EN 60695-2-10 a 850 °C, EN 60695-2-11

CONDUCTOR TYPE: rigid and flexible**MAX OPERATING TEMPERATURE:** 85 °C**PROTECTION GRADE:** IP20**ACCORDING TO STD.:** EN 60998-1: 2004, EN 60998-2-1: 2004

Code	Conductor section	Connection capability Section	Connection capability N. rigid conductors	Connection capability N. flexible conductors	Rated voltage	Test current	Screw	D1	L1	W1	S1	Ways	
	mm ²	mm ²			V	A		mm	mm	mm	mm		
9924CS	4	4	2	2	450	32	M4	4,5	10,3	21	20	10	10/400
		2,5	2 ÷ 3	2 ÷ 3									
		1,5	2 ÷ 4	2 ÷ 4									
		1	2 ÷ 5	2 ÷ 5									
		0,75	2 ÷ 6	2 ÷ 6									
		0,5	2 ÷ 10	2 ÷ 10									
993CS	6	6	2	2	450	41	M4	6	11,8	22,5	23	10	10/300
		4	2 ÷ 3	2 ÷ 3									
		2,5	2 ÷ 4	2 ÷ 4									
		1,5	2 ÷ 6	2 ÷ 6									
		1	2 ÷ 8	2 ÷ 8									
		0,75	2 ÷ 10	2 ÷ 10									
994CS	10	10	2	2	450	57	M6	7,9	14,7	26	26	10	10/200
		6	2 ÷ 3	2 ÷ 3									
		4	2 ÷ 5	2 ÷ 5									
		2,5	2 ÷ 8	2 ÷ 8									
		1,5	2 ÷ 12	2 ÷ 12									
		1	2 ÷ 15	2 ÷ 15									
		0,75	2 ÷ 15	2 ÷ 15									



990289



BM SPA • Viale Milano 54/56 • 20089 Rozzano MI • Italy
Tel. +39 02 8923911 r.a. • Fax +39 02 8256873
www.bm-group.com • info@bm-group.com

