




# Technical sheet

No. **11FA10A**


Issue **V01.2**

**Product family:** Cable-ties - Nylon cable-ties UV resistant  
**Item code:** N1890, N2690, N3690  
**Description:** NYLON CABLE TIES UV RESISTANT - IMPACT RESISTANT


## Image

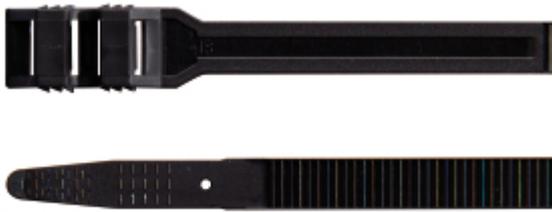

## Technical drawing



Cod. N1890



Cod. N2690  
Cod. N3690

## Specifications

**MATERIAL:** polyamide (PA 6.6) + carbon black  
**COLOR:** black  
**INSULATION SELF-EXTINGUISHING:** UL 94 V2  
**OPERATING TEMPERATURE:** from -40 °C to +85 °C  
**MINIMUM INSTALLATION TEMPERATURE:** -10 °C  
**CHEMICAL RESISTANCE:** good resistance to bases, oils, grease, chloride solvents. Limited resistance to acids. Not resistant to phenols.  
**ACCORDING TO STD.:** EN 62275:2015-02  
**CLASSIFICATION:** type 1 (EN)  
**ASSEMBLY:** open the package just before use

Code	Width (mm)	Length (mm)	Max bundle Ø (mm)	Min bundle Ø (mm)	Tensile minimum resistance (N)	
N1890	9	180	40	20	400	100/1500
N2690	9	265	62	20	540	100/1400
N3690	9	360	93	20	540	100/500



**HALOGEN  
FREE**

**UV  
RESISTANT**