

Product family: Cable protection - Thermo shrinking cable protection


Item code: GBS016MBL, GBS016MNE, GBS016MRO, GBS024MBL, GBS024MNE, GBS024MRO, GBS032MBL, GBS032MGV, GBS032MNE, GBS032MRO, GBS048MBL, GBS048MGV, GBS048MNE, GBS048MRO, GBS064MBL, GBS064MGV, GBS064MNE, GBS064MRO, GBS095MBL, GBS095MGV, GBS095MNE, GBS095MRO, GBS127MBL, GBS127MGV, GBS127MNE, GBS127MRO, GBS190MBL, GBS190MGV, GBS190MNE, GBS190MRO, GBS254MBL, GBS254MGV, GBS254MNE, GBS254MRO

Description: THERMO SHRINKING CABLE PROTECTION · THIN WALL 2:1 · IN MINIBOX

Image



Technical drawing

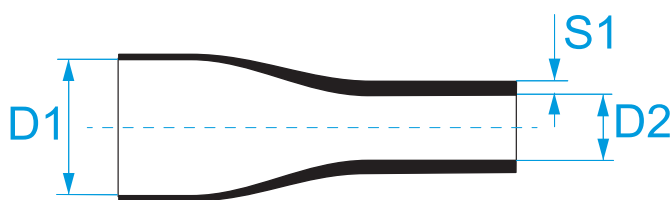

Specifications

SHRINKAGE RATIO: 2:1

MATERIAL: polyethylene

OPERATING TEMPERATURE: from -55°C to +125°C max

SHRINKAGE TEMPERATURE: from +70°C to +125°C

VRMS MAX: 600 V

SHEATH SELF-EXTINGUISHING GRADE: UL 224 VW-1 except for yellow-green

HALOGEN FREE: all colours except for yellow-green

APPLICATIONS: economic and efficient insulation and protection of connections and terminals in various industries, including electronics, automotive, railway and marine. The availability of many colours makes cable identification easy.

Code	Size (mm)	Length (m)	Color	D1 (Ø mm)	D2 (Ø mm)	S1 (mm)	
GBS016MBL*	1,6	12	Blue	1,6	0,8	0,40	
GBS016MNE*	1,6	12	Black	1,6	0,8	0,40	1/1
GBS016MRO*	1,6	12	Red	1,6	0,8	0,40	
GBS024MBL*	2,4	11	Blue	2,4	1,2	0,40	
GBS024MNE*	2,4	11	Black	2,4	1,2	0,40	1/1
GBS024MRO*	2,4	11	Red	2,4	1,2	0,40	
GBS032MBL*	3,2	11	Blue	3,2	1,6	0,48	
GBS032MGV	3,2	11	YellowGreen	3,2	1,6	0,48	1/1
GBS032MNE*	3,2	11	Black	3,2	1,6	0,48	
GBS032MRO*	3,2	11	Red	1,6	1,6	0,48	
GBS048MBL*	4,8	10	Blue	4,8	2,4	0,48	
GBS048MGV	4,8	10	YellowGreen	4,8	2,4	0,48	1/1
GBS048MNE*	4,8	10	Black	4,8	2,4	0,48	
GBS048MRO*	4,8	10	Red	4,8	2,4	0,48	
GBS064MBL*	6,4	9	Blue	6,4	3,2	0,56	
GBS064MGV	6,4	9	YellowGreen	6,4	3,2	0,56	1/1
GBS064MNE*	6,4	9	Black	6,4	3,2	0,56	
GBS064MRO*	6,4	9	Red	6,4	3,2	0,56	
GBS095MBL*	9,5	7	Blue	9,5	4,8	0,62	
GBS095MGV	9,5	7	YellowGreen	9,5	4,8	0,62	1/1
GBS095MNE*	9,5	7	Black	9,5	4,8	0,62	
GBS095MRO*	9,5	7	Red	9,5	4,8	0,62	
GBS127MBL*	12,7	6	Blue	12,7	6,4	0,62	
GBS127MGV	12,7	6	YellowGreen	12,7	6,4	0,62	1/1
GBS127MNE*	12,7	6	Black	12,7	6,4	0,62	
GBS127MRO*	12,7	6	Red	12,7	6,4	0,62	
GBS190MBL*	19	5	Blue	19,1	9,5	0,69	
GBS190MGV	19	5	YellowGreen	19,1	9,5	0,69	1/1
GBS190MNE*	19	5	Black	19,1	9,5	0,69	
GBS190MRO*	19	5	Red	19,1	9,5	0,69	
GBS254MBL*	25,4	3,5	Blue	25,4	12,7	0,89	
GBS254MGV	25,4	3,5	YellowGreen	25,4	12,7	0,89	1/1
GBS254MNE*	25,4	3,5	Black	25,4	12,7	0,89	
GBS254MRO*	25,4	3,5	Red	25,4	12,7	0,89	