


Product family: Cable protection - Thermo shrinking cable protection

Item code: GBS024SBI, GBS024SBL, GBS024SNE, GBS024SRO, GBS024STR, GBS032SBI, GBS032SBL, GBS032SGV, GBS032SNE, GBS032SRO, GBS032STR, GBS048SBI, GBS048SBL, GBS048SGV, GBS048SNE, GBS048SRO, GBS048STR, GBS064SBI, GBS064SBL, GBS064SGV, GBS064SNE, GBS064SRO, GBS064STR, GBS095SBI, GBS095SBL, GBS095SGV, GBS095SNE, GBS095SRO, GBS095STR, GBS127SBI, GBS127SBL, GBS127SGV, GBS127SNE, GBS127SRO, GBS127STR, GBS190SBI, GBS190SBL, GBS190SGV, GBS190SNE, GBS190SRO, GBS190STR, GBS254SBI, GBS254SBL, GBS254SGV, GBS254SNE, GBS254SRO, GBS254STR, GBS380SBI, GBS380SBL, GBS380SGV, GBS380SNE, GBS380SRO, GBS380STR, GBS510SBI, GBS510SBL, GBS510SGV, GBS510SNE, GBS510SRO, GBS510STR

Description: THERMO SHRINKING CABLE PROTECTION · THIN WALL 2:1 · BAR

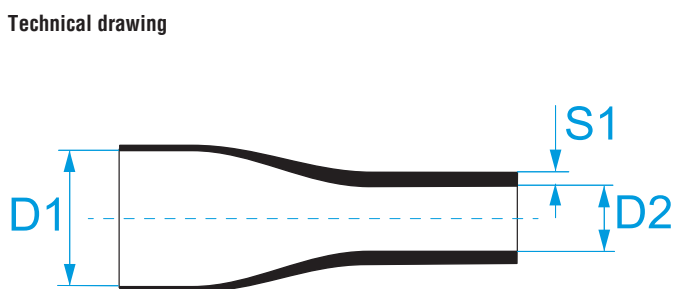

Specifications

TYPE: single wall

SHRINKAGE RATIO: 2:1

MATERIAL: polyethylene

OPERATING TEMPERATURE: from -55°C to +125°C max (+105 °C max for transparent)

SHRINKAGE TEMPERATURE: from +70°C to +125°C

VRMS MAX: 600 V

THEATH SELF-EXTINGUISHING GRADE: UL 224 VW-1 (except transparent and yellow-green)

HALOGEN FREE: all colours except for yellow-green and transparent

APPLICATIONS: economic and efficient insulation and protection of connections and terminals in various industries, including electronics, automotive, railway and marine. The availability of many colours makes cable identification easy.

Code	Size (mm)	Length (m)	Color	D1 (Ø mm)	D2 (Ø mm)	S1 (mm)	
GBS024SBI*	2,4	1	White	2,4	1,2	0,48	25/25
GBS024SBL*	2,4	1	Blue	2,4	1,2	0,48	
GBS024SNE*	2,4	1	Black	2,4	1,2	0,48	
GBS024SRO*	2,4	1	Red	2,4	1,2	0,48	
GBS024STR	2,4	1	Transparent	2,4	1,2	0,48	
GBS032SBI*	3,2	1	White	3,2	1,6	0,48	25/25
GBS032SBL*	3,2	1	Blue	3,2	1,6	0,48	
GBS032SGV	3,2	1	YellowGreen	3,2	1,6	0,48	
GBS032SNE*	3,2	1	Black	3,2	1,6	0,48	
GBS032SRO*	3,2	1	Red	3,2	1,6	0,48	
GBS032STR	3,2	1	Transparent	3,2	1,6	0,48	
GBS048SBI*	4,8	1	White	4,8	2,4	0,48	10/10
GBS048SBL*	4,8	1	Blue	4,8	2,4	0,48	
GBS048SGV	4,8	1	YellowGreen	4,8	2,4	0,48	
GBS048SNE*	4,8	1	Black	4,8	2,4	0,48	
GBS048SRO*	4,8	1	Red	4,8	2,4	0,48	
GBS048STR	4,8	1	Transparent	4,8	2,4	0,48	
GBS064SBI*	6,4	1	White	6,4	3,2	0,56	10/10
GBS064SBL*	6,4	1	Blue	6,4	3,2	0,56	
GBS064SGV	6,4	1	YellowGreen	6,4	3,2	0,56	
GBS064SNE*	6,4	1	Black	6,4	3,2	0,56	
GBS064SRO*	6,4	1	Red	6,4	3,2	0,56	
GBS064STR	6,4	1	Transparent	6,4	3,2	0,56	
GBS095SBI*	9,5	1	White	9,5	4,8	0,62	10/10
GBS095SBL*	9,5	1	Blue	9,5	4,8	0,62	
GBS095SGV	9,5	1	YellowGreen	9,5	4,8	0,62	
GBS095SNE*	9,5	1	Black	9,5	4,8	0,62	
GBS095SRO*	9,5	1	Red	9,5	4,8	0,62	
GBS095STR	9,5	1	Transparent	9,5	4,8	0,62	
GBS127SBI*	12,7	1	White	12,7	6,4	0,62	10/10
GBS127SBL*	12,7	1	Blue	12,7	6,4	0,62	
GBS127SGV	12,7	1	YellowGreen	12,7	6,4	0,62	
GBS127SNE*	12,7	1	Black	12,7	6,4	0,62	
GBS127SRO*	12,7	1	Red	12,7	6,4	0,62	
GBS127STR	12,7	1	Transparent	12,7	6,4	0,62	
GBS190SBI*	19	1	White	19,1	9,5	0,69	10/10
GBS190SBL*	19	1	Blue	19,1	9,5	0,69	
GBS190SGV	19	1	YellowGreen	19,1	9,5	0,69	
GBS190SNE*	19	1	Black	19,1	9,5	0,69	
GBS190SRO*	19	1	Red	19,1	9,5	0,69	
GBS190STR	19	1	Transparent	19,1	9,5	0,69	
GBS254SBI*	25,4	1	White	25,4	12,7	0,89	10/10
GBS254SBL*	25,4	1	Blue	25,4	12,7	0,89	
GBS254SGV	25,4	1	YellowGreen	25,4	12,7	0,89	
GBS254SNE*	25,4	1	Black	25,4	12,7	0,89	
GBS254SRO*	25,4	1	Red	25,4	12,7	0,89	
GBS254STR	25,4	1	Transparent	25,4	12,7	0,89	
GBS380SBI*	38	1	White	38,1	19,1	1,00	10/10
GBS380SBL*	38	1	Blue	38,1	19,1	1,00	
GBS380SGV	38	1	YellowGreen	38,1	19,1	1,00	
GBS380SNE*	38	1	Black	38,1	19,1	1,00	
GBS380SRO*	38	1	Red	38,1	19,1	1,00	
GBS380STR	38	1	Transparent	38,1	19,1	1,00	
GBS510SBI	51	1	White	50,8	25,4	1,10	5/5
GBS510SBL	51	1	Blue	50,8	25,4	1,10	
GBS510SGV	51	1	YellowGreen	50,8	25,4	1,10	
GBS510SNE	51	1	Black	50,8	25,4	1,10	
GBS510SRO	51	1	Red	50,8	25,4	1,10	
GBS510STR	51	1	Transparent	50,8	25,4	1,10	