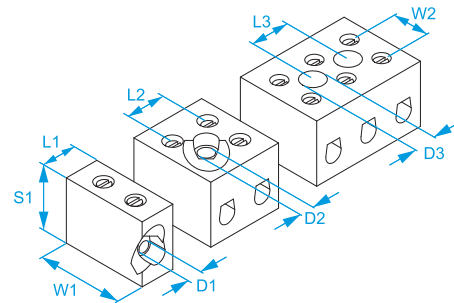


**Product family:** Terminal blocks - Multiway in steatite  
**Code:** 9516, 9517, 9518, 9519, 9520, 9521, 9522, 9523, 9524  
**Description:** MULTIWAY TERMINAL BLOCKS · STEATITE

**Image:**

**Technical Drawing:**


Terminal blocks for high temperature applications

**Specifications:**

**INSULATING HOUSING:** steatite  
**CONDUCTIVE BODY:** brass  
**CONDUCTOR TYPE:** rigid and flexible  
**MOUNTING HOLE:** through hole (no threaded)  
**MAX OPERATING TEMPERATURE (METALLIC PARTS):** 300 °C  
**MAX OPERATING TEMPERATURE (INSULATING HOUSING):** 1000 °C  
**PROTECTION GRADE:** IP00  
**ACCORDING TO STD.:** EN 60998-1: 2004, EN 60998-2-1: 2004

Code	Section (mm <sup>2</sup> )	Test current (A)	Screw	Torque (Nm)	L1 (mm)	L2 (mm)	L3 (mm)	W1 (mm)	W2 (mm)	S1 (mm)	D1 (mm)	D2 (mm)	D3 (mm)	
9516	4	32	M3	0,25	10			25	10	18,5	3,1			117/117
9517	4	32	M3	0,25	22	11,5		25	10	18,5	3,1	4,1	5,8	54/54
9518	4	32	M3	0,25	34	11,5	11,5	25	10	18,5	3,1	4,1	6,5	36/36
9519	6	41	M3.5	0,4	11			26	10	20,5	4,2			117/117
9520	6	41	M3.5	0,4	24	12,5		26	10	20,5	4,2	4	5,8	54/54
9521	6	41	M3.5	0,4	37	12,5	12,5	26	10	20,5	4,2	4	7,3	36/36
9522	16	76	M4	0,7	15			32,5	13	23	6			54/54
9523	16	76	M4	0,7	30	14,8		32,5	13	23	6	4	6,9	27/27
9524	16	76	M4	0,7	45	14,8	14,8	32,5	13	23	6	4,1	7,9	18/18

