

Product family: Terminal blocks - For free connections


Item code: 9960CS

Description: ONE-WAY TERMINAL BLOCKS · END CONNECTORS · BARS · WITH INDIRECT CLAMPING

Image



Technical drawing

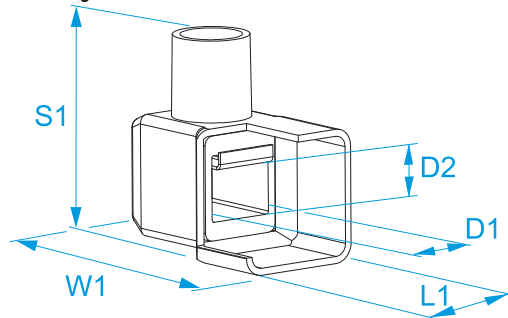

Specifications

INSULATING HOUSING: transparent polycarbonate (PC) UL 94 V0

CONDUCTIVE BODY: brass

WIRE PROTECTION: stainless steel

CAPTIVE SCREW IN: galvanized steel

INSULATION SELF-EXTINGUISHING: EN 60335-1: 2002+A2:2006 (par. 30.2.3), EN 60695-2-10 a 850 °C, EN 60695-2-11

CONDUCTOR TYPE: rigid and flexible

MAX OPERATING TEMPERATURE: 85 °C

PROTECTION GRADE: IP00

ACCORDING TO STD.: EN 60998-1: 2004, EN 60998-2-1: 2004

Code	Conductor section (mm ²)	Connection capability Section (mm ²)	Connection capability N. rigid conductors	Connection capability N. flexible conductors	Rated voltage (V)	Test current (A)	Screw	D1 (mm)	D2 (mm)	L1 (mm)	W1 (mm)	S1 (mm)	
9960CS	25	25	2	2	450	101	M10	12	9,1	22,5	36,3	37	50/50
		16	2 ÷ 3	2 ÷ 3									
		10	2 ÷ 4	2 ÷ 4									
		6	2 ÷ 8	2 ÷ 8									
		4	2 ÷ 11	2 ÷ 11									
		2,5	4 ÷ 16	4 ÷ 16									

