


**Product family:** Terminal blocks - One-way  
**Item code:** 9982  
**Description:** ONE-WAY TERMINAL BLOCKS - 11 INPUTS

Image




Technical drawing

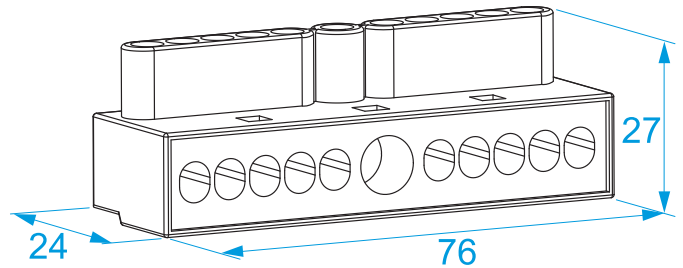

### Specifications

**INSULATING HOUSING:** transparent polycarbonate (PC) UL 94 V0  
**CONDUCTIVE BODY:** brass  
**SCREW IN:** galvanized steel  
**INSULATION SELF-EXTINGUISHING:** EN 60335-1: 2002+A2:2006 (par. 30.2.3), EN 60695-2-10 a 850 °C, EN 60695-2-11  
**CONDUCTOR TYPE:** rigid and flexible  
**MAX OPERATING TEMPERATURE:** 85 °C  
**PROTECTION GRADE:** IP20  
**ACCORDING TO STD.:** EN 60998-1: 2004, EN 60998-2-1: 2004

Code	Conductor section (mm <sup>2</sup> )	Rated voltage (V)	Test current (A)	Inputs	Stripping length (mm)	Screw	
9982	(2,5 ÷ 6) x 10	750	40	11	11	M4	25/25

